


HFC indexable insert milling tools

NEW

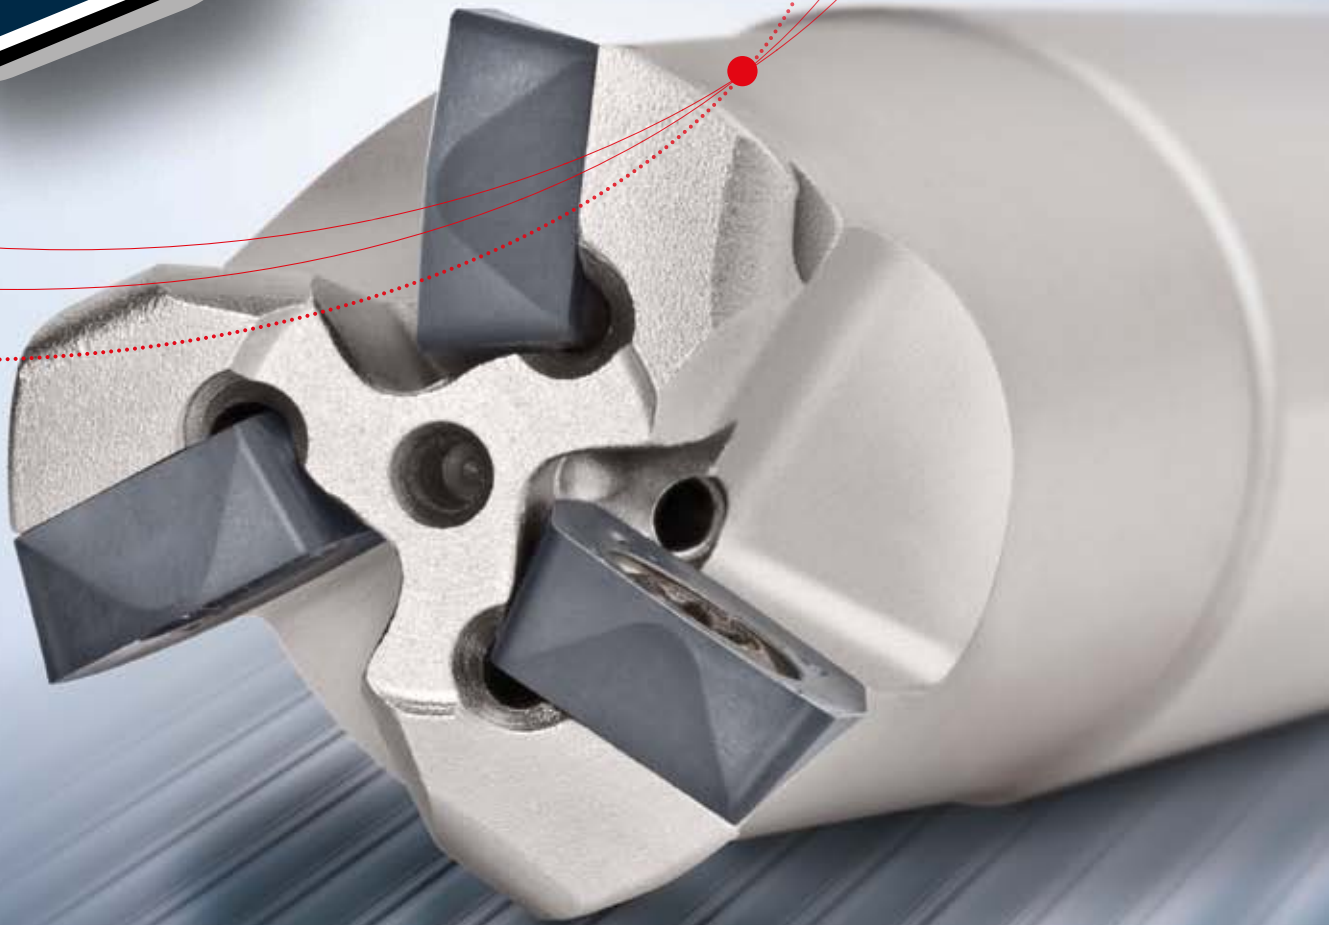

High-performance roughing with HFC indexable milling inserts

The main application of the **HFC** milling system is high-performance rough machining. The variety of materials which can be effectively machined by means of the **HFC** range, comprises all kinds of steel with a hardness up to 54 HRC, stainless steel (INOX) as well as all difficult-to-machine materials.

HFC milling has several advantages compared to milling with round indexable inserts, which make a migration to this technology very attractive.

HFC milling is significantly more productive, safer in process and additionally less expensive than milling with conventional round indexable insert systems.

The higher degree of optimisation of the **HFC** system as well as the reduction of set-up times are further arguments in favour of **HFC**.


The advantages:

- **Higher degree of productivity:** Reduction of the machine utilisation time which results in a reduction of the machine costs and investments
- **Higher degree of process security** and more controllable wear development
- **Better price-performance ratio:** Lower insert costs per workpiece
- **Minimal set-up costs and set-up times:** Simple and quick insert changing process
- **Higher level of efficiency** and reduced requirements for machine rigidity
- **Better process stability:** Reduced number of control checks and tools



Range structure

The FRAISA range for **HFC** milling with indexable inserts includes face mill type, screw-in and end milling cutters. All holding devices can be combined with the three indexable inserts for the areas of steel (NX), stainless steel (SX) and special requirements (ZX). All versions are available for inserts with sizes of 10 and 13 mm.

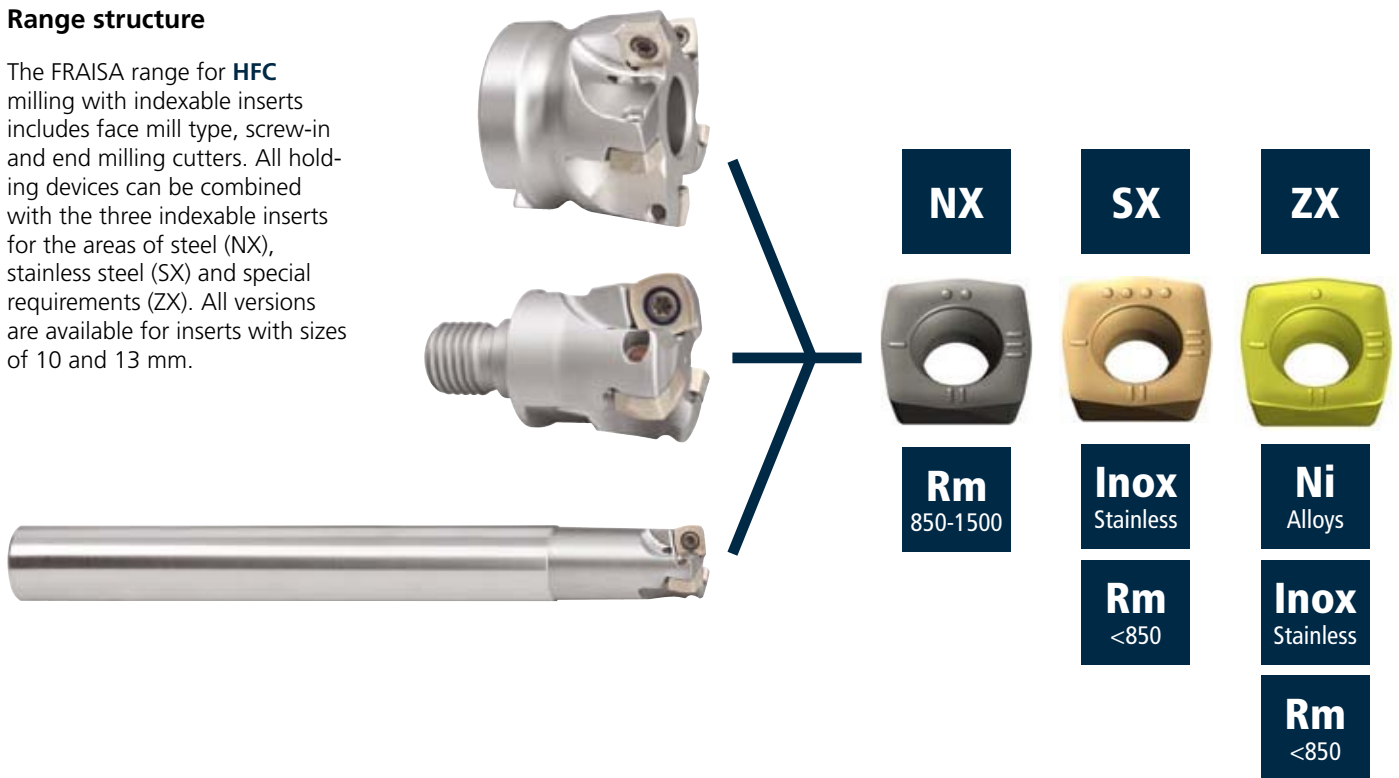

Comparison with the round indexable insert technology

As part of the **HFC technology** the axial infeed depth a_p is distributed over a very large cutting edge length thanks to the inclination of the insert edge. The specific stress of the cutting edge remains low. As a result, significantly higher infeed rates can be used process-safely compared to applications with round indexable inserts.

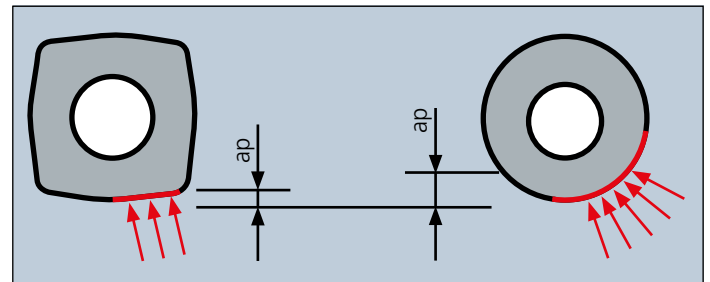


Fig. 1: Direction of the cutting forces of HFC and round indexable inserts

Higher degree of productivity

The metal removal volume when using **HFC** is considerably higher compared to the round indexable insert system. The **HFC** productivity capacity is 120% higher!

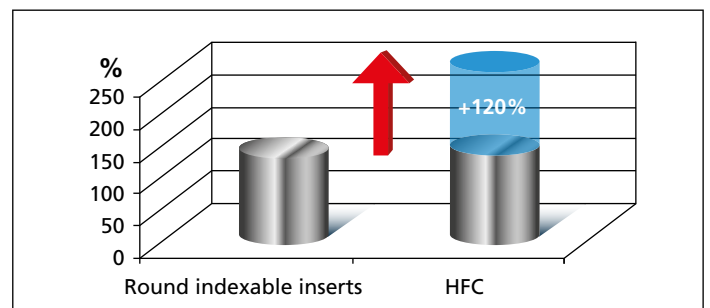


Fig. 2: Productivity using HFC and round indexable inserts

Higher level of process security

The wear and the mechanical stress are uniformly distributed over a longer cutting edge which enables the wear development to be controlled more easily. Thus, the process-secure operating time can be increased by 30%.

Zones of wear of round indexable inserts



Zones of wear of HFC



Better price-performance ratio

A longer process-secure operating time and an increased metal removal volume result in a considerably higher overall removal volume per tool body and insert combination. The costs for indexable inserts for the **HFC technology** are about 40% lower than for the round indexable insert technology.

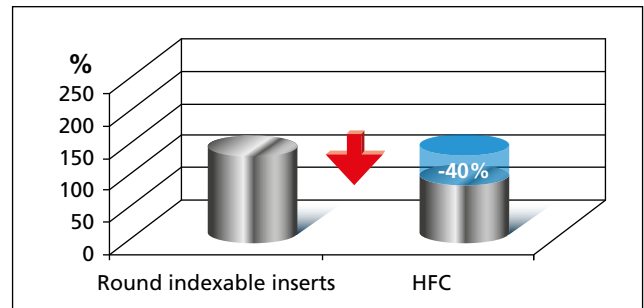


Fig. 3: Wear development in the case of round indexable inserts and HFC

Minimal set-up costs and set-up times

HFC inserts can be positioned easily and safely. This results in shorter set-up times and a high process security. Compared to the round indexable insert systems with their complex fine positioning of inserts, savings in terms of set-up time of up to 50% are achieved.

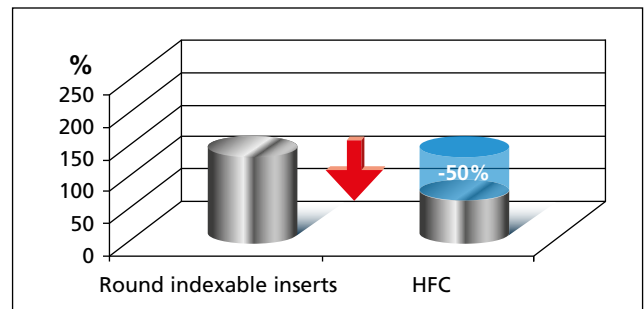


Fig. 4: Savings in terms of time when setting up with HFC inserts

Higher degree of efficiency

Due to the tool stabilisation in the axial direction and the reduction of radial cutting forces the stress on the machine tool is lower. This also enables the use on less efficient machines. The power input of the spindle is lower, which results in an improved energy efficiency.



Better process stability

Thanks to the process security at highest metal removal volume, more components per cutting edge can be manufactured. This increases the degree of optimisation, reduces cutting edge control checks and requires less tools.



HFC indexable inserts

High feed end mills for indexable inserts 10 mm

N°W02140



NX	λ 2° γ 14°	HFC	Rm 850-1500		
SX	λ 2° γ 15°	HFC	Inox Stainless	Rm <850	
ZX	λ 2° γ 15°	HFC	Ni Alloys	Inox Stainless	Rm <850

High feed end mills for indexable inserts 13 mm

N°W02150



NX	λ 0° γ 12°	HFC	Rm 850-1500		
SX	λ 0° γ 13°	HFC	Inox Stainless	Rm <850	
ZX	λ 0° γ 13°	HFC	Ni Alloys	Inox Stainless	Rm <850

High feed face mills for indexable inserts 10 mm

N°W02400



NX	λ 4° γ 16°	HFC	Rm 850-1500		
SX	λ 4° γ 17°	HFC	Inox Stainless	Rm <850	
ZX	λ 4° γ 17°	HFC	Ni Alloys	Inox Stainless	Rm <850

High feed face mills for indexable inserts 13 mm

N°W02410



NX	λ 4° γ 16°	HFC	Rm 850-1500		
SX	λ 4° γ 17°	HFC	Inox Stainless	Rm <850	
ZX	λ 4° γ 17°	HFC	Ni Alloys	Inox Stainless	Rm <850

High feed end mills for indexable inserts 10 mm

N°W02200



NX	λ 2° γ 14°	HFC	Rm 850-1500		
SX	λ 2° γ 15°	HFC	Inox Stainless	Rm <850	
ZX	λ 2° γ 15°	HFC	Ni Alloys	Inox Stainless	Rm <850

High feed end mills for indexable inserts 13 mm

N°W02210



NX	λ 0° γ 12°	HFC	Rm 850-1500		
SX	λ 0° γ 13°	HFC	Inox Stainless	Rm <850	
ZX	λ 0° γ 13°	HFC	Ni Alloys	Inox Stainless	Rm <850



The fastest way to our E-Shop can be found here.



Where is it possible to ask questions concerning the product?

If you have any question, please send an email to mail.ch@fraisa.com. You may also directly contact our local customer consultant.

The FRAISA application engineers will be happy to advise you.

For further information, please refer to www.fraisa.com

FRAISA SA

Gurzelenstr. 7
CH-4512 Bellach

Phone: +41(0) 32 617 42 42

Fax: +41(0) 32 617 42 41

E-Mail: mail.ch@fraisa.com

www.fraisa.com



Here, you will be provided with further information on the FRAISA Group.



The fastest way to our E-Shop can be found here.

You can also use our ordering service via our E-Shop and benefit from our changing offers.

The Fraisa logo, consisting of the word "fraisa" in a lowercase, sans-serif font, enclosed within a white oval shape. The logo is set against a dark blue rectangular background.